




TM
®

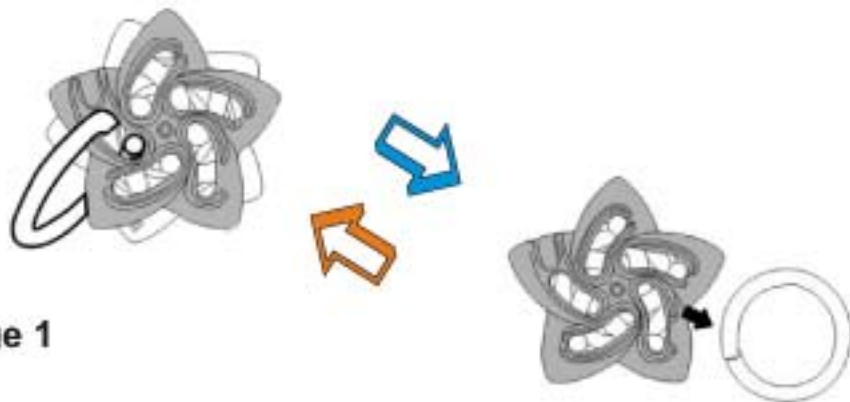

Page 1


© Japan 2009 - 2010
All design and copyrights reserved

Exclusive European distribution
by Eureka bvba - 2800 Mechelen,
Belgium



Designer: Akio Yamamoto (JP)

1 The parts and locations are as shown below.

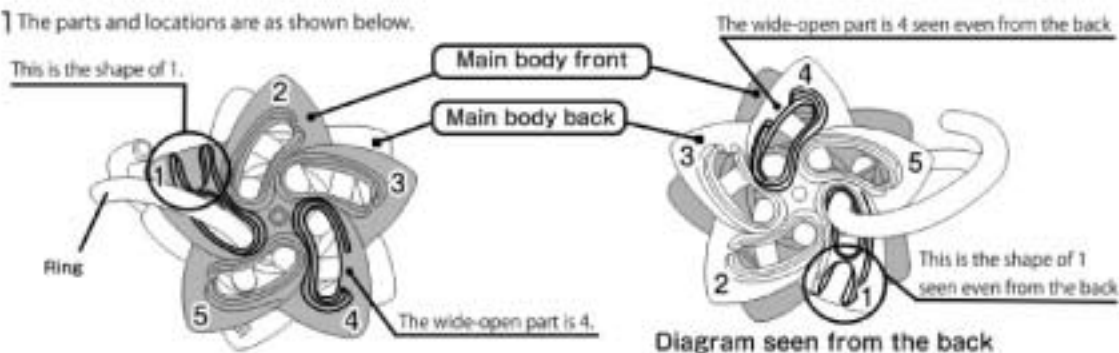


2 Moving the back and front of the main body left and right to misalign them will create a gap large enough for the ring to pass through the part overlapping the main body. Rotating the ring while passing it through the gap enables the ring to be moved to various positions.

Moving the main body creates a gap → Rotate the ring while passing it through the gap → The ring can be moved to various positions



3 Once the ring is able to be moved to various positions, pass it through gaps "3" and "4", from both the front and back of the main body.

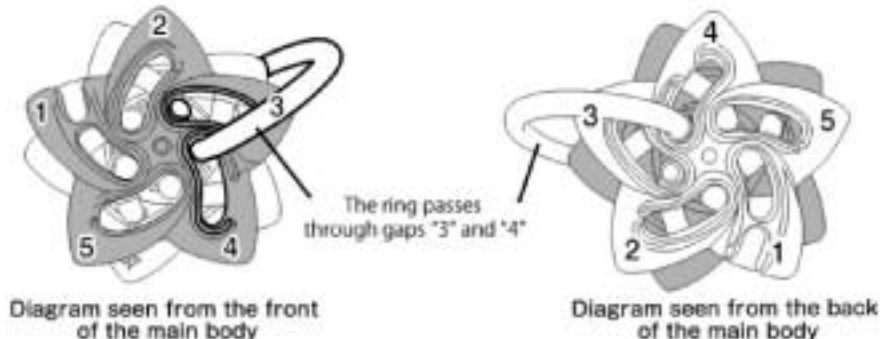

— Example of passing the ring through "3" and "4" —

